

Pb Free Plating Product

L7805CV/L7812CV/L7815CV



THINKISEMI 1.0 AMPERE POSITIVE THREE TERMINAL REGULATOR

<p>Features</p> <ul style="list-style-type: none"> ※ Output current to 1.0A ※ Thermal overload protection ※ Short circuit protection ※ Output transition SOA protection <p>Application</p> <ul style="list-style-type: none"> ※ Switching Regulators and Amplifiers ※ AC and DC Motor Controls ※ Inverters, Solenoid and Relay Drivers <p>Mechanical Data</p> <ul style="list-style-type: none"> ※ Case: TO-220W-SQ metal package ※ Operating Temperature Range -65 to +300 °C ※ Terminals: Solderable per MIL-STD-202 method 208 ※ Polarity: As per configuration ※ Mounting position: Any ※ Weight: 2.0 gram approximately 	<p>TO-220W-SQ outline</p>
--	---------------------------

Electrical Characteristics L78xxCV

0°C ≤ T_J ≤ 125°C unless otherwise noted.

			L7805CV			L7812CV			L7815CV			Units
Output Voltage			5V			12V			15V			
Input Voltage (unless otherwise noted)			10V			19V			23V			
Symbol	Parameter	Conditions	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
	Short-Circuit Current	T _J = 25°C	2.1			1.5			1.2			A
	Peak Output Current	T _J = 25°C	2.4			2.4			2.4			A
	Average TC of V _{OUT}	0°C ≤ T _J ≤ +125°C, I _O = 5 mA	0.6			1.5			1.8			mV/°C
V _{IN}	Input Voltage Required to Maintain Line Regulation	T _J = 25°C, I _O ≤ 1A	7.5			14.6			17.7			V

Absolute Maximum Ratings

Input Voltage (V _O = 5V, 12V and 15V)	35V
Internal Power Dissipation (Note 1)	Internally Limited
Operating Temperature Range (T _A)	0°C to +70°C
Maximum Junction Temperature (TO-3 Package)	150°C
(TO-220 Package)	150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.) TO-3 Package	300°C
TO-220 Package	230°C

Electrical Characteristics L78xxCV

0°C ≤ T_J ≤ 125°C unless otherwise noted.

				L7805CV			L7812CV			L7815CV			
Output Voltage				5V			12V			15V			
Input Voltage (unless otherwise noted)				10V			19V			23V			
Symbol	Parameter	Conditions		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
V _O	Output Voltage	T _J = 25°C, 5 mA ≤ I _O ≤ 1A		4.8	5	5.2	11.5	12	12.5	14.4	15	15.6	V
		P _D ≤ 15W, 5 mA ≤ I _O ≤ 1A		4.75		5.25	11.4		12.6	14.25		15.75	V
		V _{MIN} ≤ V _{IN} ≤ V _{MAX}		(7.5 ≤ V _{IN} ≤ 20)			(14.5 ≤ V _{IN} ≤ 27)			(17.5 ≤ V _{IN} ≤ 30)			V
ΔV _O	Line Regulation	I _O = 500 mA	T _J = 25°C	3		50	4		120	4		150	mV
			ΔV _{IN}	(7 ≤ V _{IN} ≤ 25)			14.5 ≤ V _{IN} ≤ 30)			(17.5 ≤ V _{IN} ≤ 30)			V
			0°C ≤ T _J ≤ +125°C	50			120			150			mV
		ΔV _{IN}	(8 ≤ V _{IN} ≤ 20)			(15 ≤ V _{IN} ≤ 27)			(18.5 ≤ V _{IN} ≤ 30)			V	
		I _O ≤ 1A	T _J = 25°C	50		120		150		mV			
			ΔV _{IN}	(7.5 ≤ V _{IN} ≤ 20)			(14.6 ≤ V _{IN} ≤ 27)			(17.7 ≤ V _{IN} ≤ 30)			V
0°C ≤ T _J ≤ +125°C	25		60		75		mV						
ΔV _{IN}	(8 ≤ V _{IN} ≤ 12)			(16 ≤ V _{IN} ≤ 22)			(20 ≤ V _{IN} ≤ 26)			V			
ΔV _O	Load Regulation	T _J = 25°C	5 mA ≤ I _O ≤ 1.5A	10	50	12	120	12	150	mV			
			250 mA ≤ I _O ≤ 750 mA	25		60		75		mV			
		5 mA ≤ I _O ≤ 1A, 0°C ≤ T _J ≤ +125°C	50		120		150		mV				
I _Q	Quiescent Current	I _O ≤ 1A	T _J = 25°C	8		8		8		mA			
			0°C ≤ T _J ≤ +125°C	8.5			8.5			mA			
ΔI _Q	Quiescent Current Change	5 mA ≤ I _O ≤ 1A		0.5			0.5			0.5		mA	
		T _J = 25°C, I _O ≤ 1A	V _{MIN} ≤ V _{IN} ≤ V _{MAX}	1.0			1.0			1.0		mA	
				(7.5 ≤ V _{IN} ≤ 20)			(14.8 ≤ V _{IN} ≤ 27)			(17.9 ≤ V _{IN} ≤ 30)		V	
		I _O ≤ 500 mA, 0°C ≤ T _J ≤ +125°C		1.0			1.0			1.0		mA	
V _{MIN} ≤ V _{IN} ≤ V _{MAX}		(7 ≤ V _{IN} ≤ 25)			(14.5 ≤ V _{IN} ≤ 30)			(17.5 ≤ V _{IN} ≤ 30)		V			
V _N	Output Noise Voltage	T _A = 25°C, 10 Hz ≤ f ≤ 100 kHz		40		75		90		μV			
$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	Ripple Rejection	I _O ≤ 1A, T _J = 25°C or I _O ≤ 500 mA	0°C ≤ T _J ≤ +125°C	62		80	55	72	54	70	dB		
				62		55	54	dB					
		V _{MIN} ≤ V _{IN} ≤ V _{MAX}		(8 ≤ V _{IN} ≤ 18)			(15 ≤ V _{IN} ≤ 25)			(18.5 ≤ V _{IN} ≤ 28.5)		V	
R _O	Dropout Voltage	T _J = 25°C, I _O OUT = 1A		2.0		2.0		2.0		V			
	Output Resistance	f = 1 kHz		8		18		19		mΩ			


Note 1: Thermal resistance of the TO-3 package (K, KC) is typically 4°C/W junction to case and 35°C/W case to ambient. Thermal resistance of the TO-220 package (T) is typically 4°C/W junction to case and 50°C/W case to ambient.

Note 2: All characteristics are measured with capacitor across the input of 0.22 μF, and a capacitor across the output of 0.1 μF. All characteristics except noise voltage and ripple rejection ratio are measured using pulse techniques (t_w ≤ 10 ms, duty cycle ≤ 5%). Output voltage changes due to changes in internal temperature must be taken into account separately.


Note 3: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. For guaranteed specifications and the test conditions, see Electrical Characteristics.

Typical Performance Characteristics


Maximum Average Power Dissipation

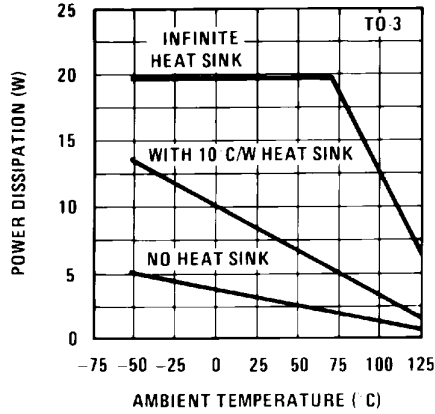


Maximum Average Power Dissipation

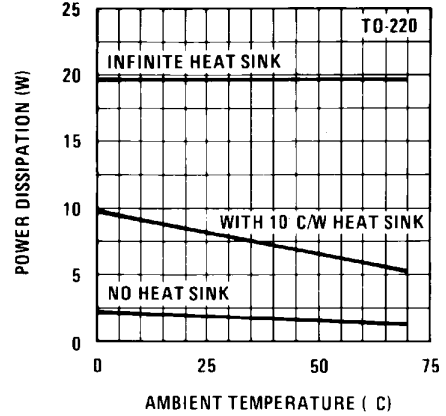


Peak Output Current

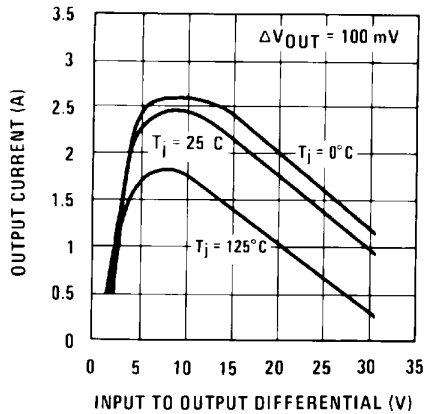


Output Voltage (Normalized to 1V at $T_j = 25^\circ\text{C}$)

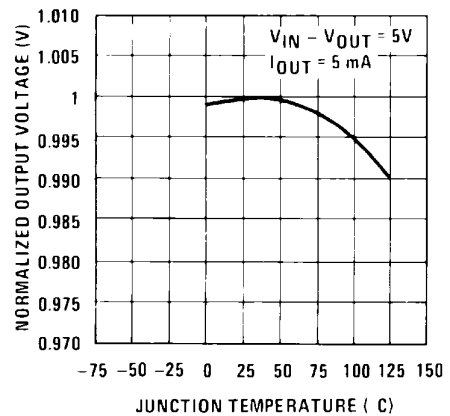

Ripple Rejection

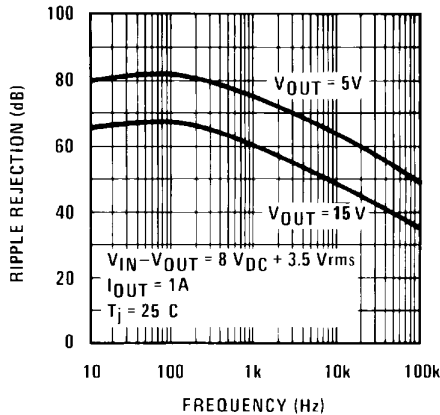


Ripple Rejection

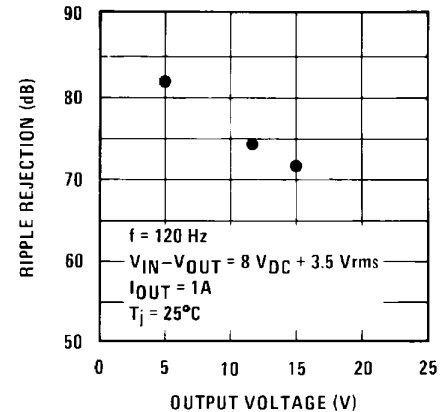


Typical Performance Characteristics (Continued)


Output Impedance

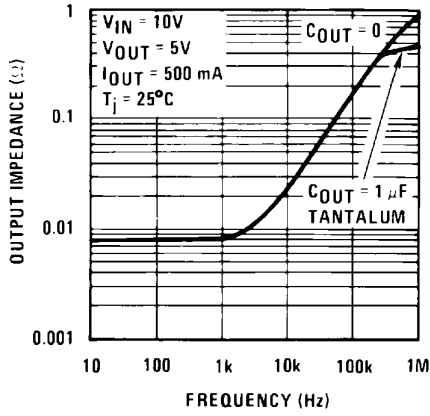


Dropout Voltage

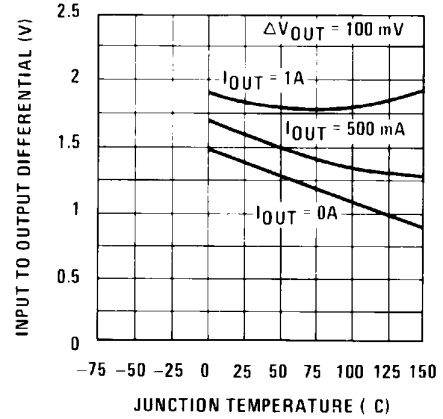


Dropout Characteristics

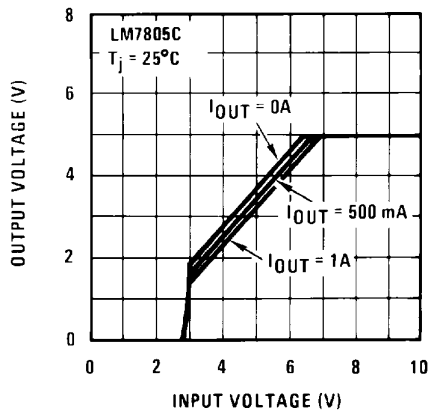

Quiescent Current

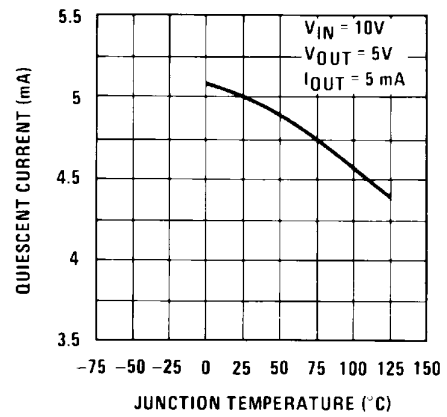

Quiescent Current

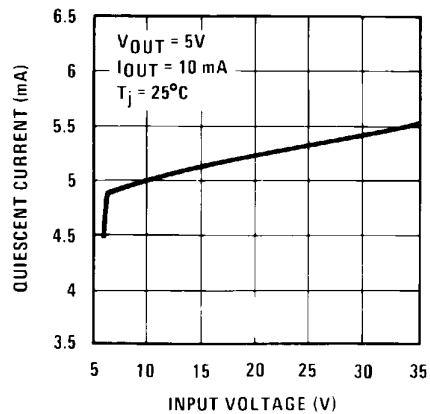

THINKI TO-220W-SQ Package Dimensions

TO-220W-SQ MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

