


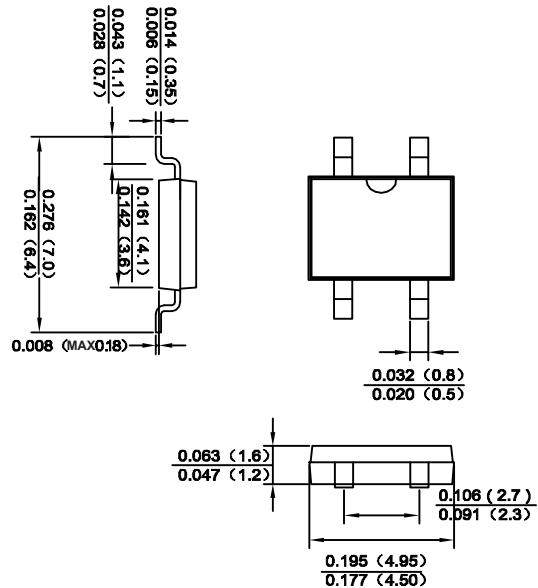

## SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS

Features

- ◆ Glass passivated die construction
- ◆ Low forward voltage drop
- ◆ High current capability
- ◆ High surge current capability
- ◆ Designed for surface mount application
- ◆ Plastic material-UL flammability 94V-0

**MBF** ROHS  
COMPLIANTMechanical Data

Case : JEDEC MBF Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.0026 ounce, 0.075 grams

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.






Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MB2F	MB4F	MB6F	MB8F	MB10F	UNITS
Marking Code	MDD MB2F	MDD MB4F	MDD MB6F	MDD MB8F	MDD MB10F		
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	1000	V
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	700	V
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	1000	V
Maximum average forward rectified current at T <sub>C</sub> =125°C	I <sub>F(AV)</sub>			1.0			A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>			35			A
Maximum instantaneous forward voltage drop per leg at 1A	V <sub>F</sub>			1.1			V
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>			5 500			uA uA
Typical junction capacitance	C <sub>J</sub>			13			pF
Typical thermal resistance	R <sub>θJA</sub>			60			°C/W
Operating temperature range	T <sub>J</sub>			-55 to +150			°C
Storage temperature range	T <sub>STG</sub>			-55 to +150			°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.

## Ratings And Characteristic Curves

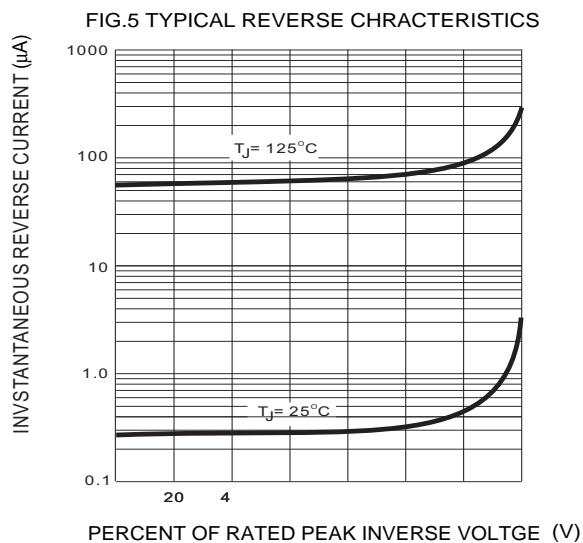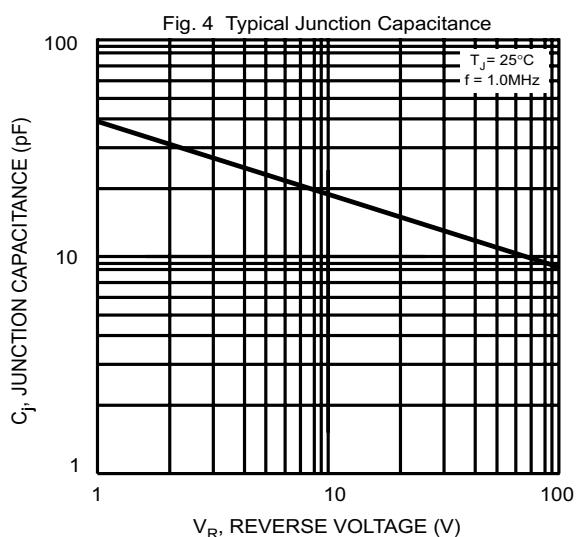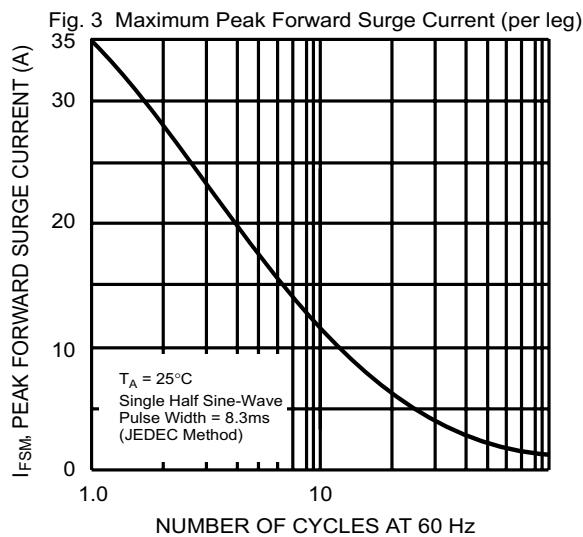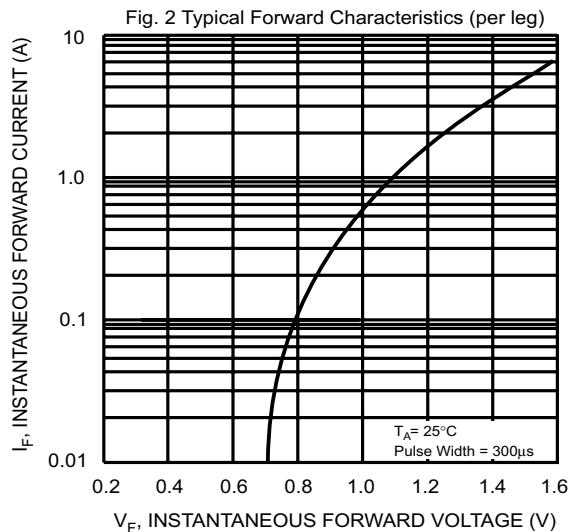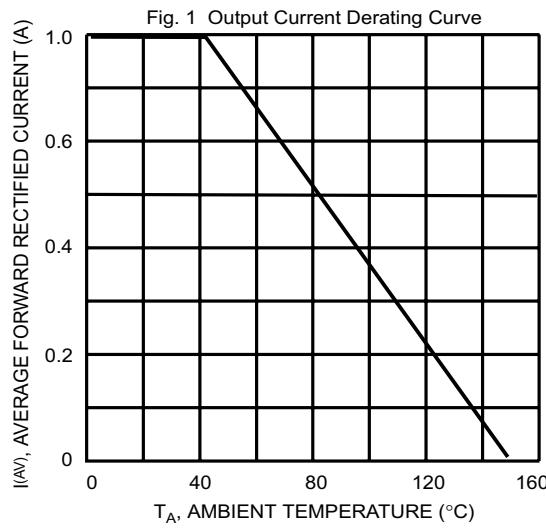

The curve above is for reference only.